

Digital Triplex Multiplexer

PR 707



16 Channel 16 Million Colour's

PROLINE UK 



FEATURES
Triplex Operation
704 x 564 pixel display for PAL Camera
Call Monitor
Fastest possible recording 60 unique fields per second
Programmable motion detection area and Sensitivity for each camera individual
Zoom in capability
Powerful Alarm Processor
User-friendly OSD menu with real time clock Function
Triplex operation (Play ,Live and Encode) available
Power loss memory function protects system setup
Video loss memory detects in each channel
Independent title generator (6Characters) for each channel
Multi screen display mode

MODEL	PR-9616
Video Input Port	16
Alarm Inputs	16
Display format	1, P/P, 4, 7, 9, 13, 19
System Operation	TRIPLEX
Resolution	704 x 564 (PAL)
Colour	16.7 million true colour's
VCR Input	BNC and S-VHS
VCR Output	BNC and S-VHS
Main monitor output	BNC and S-VHS
Call monitor	BNC
Auto sequence display	Programmable
Motion detection area	15 x 14 Dots per camera
Motion detect sensitivity	128 levels
Video loss indication	Yes
Picture freeze	Yes
Active window refresh rate	30 frames per sec
Recording mode	Synchronous & Asynchronous
Recording rate	15 fields / sec
Playback Date / time	Yes
Dynamic recording pri	Yes (Programmable)
Monitor centre adjust	Yes
Sequence dwell time	1 – 10 sec
Picture - in - Picture	Yes (movable)
Key lock function	Yes
Electronic zoom in	Yes (2 x 2)
Day / Night setting	Yes (programmable)
Camera title size	6 Characters per camera
Alarm history log	50 event
Remote control	RS 232 or RS 484
Gray bar generator	Yes
Input voltage range	DC 12V, 1.5Amp
Max power	14w
Dimensions (mm)	432 x 76 x 311 W-H-D
Weight	5.2g

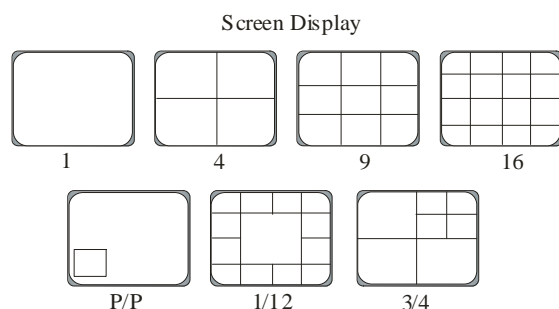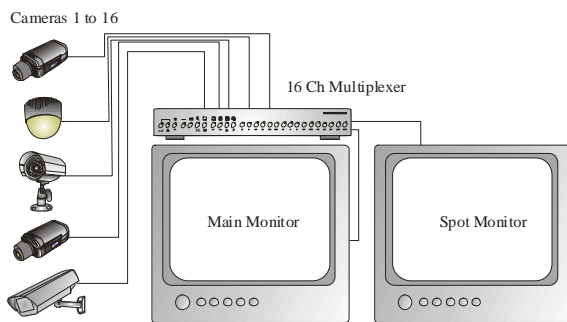

PROLINE-UK

Tel : +44 2089933377 Fax : +44 2089933388 Email : sales@proline-uk.com Web : www.proline-uk.com